


# Custom Polystyrene Core Doors

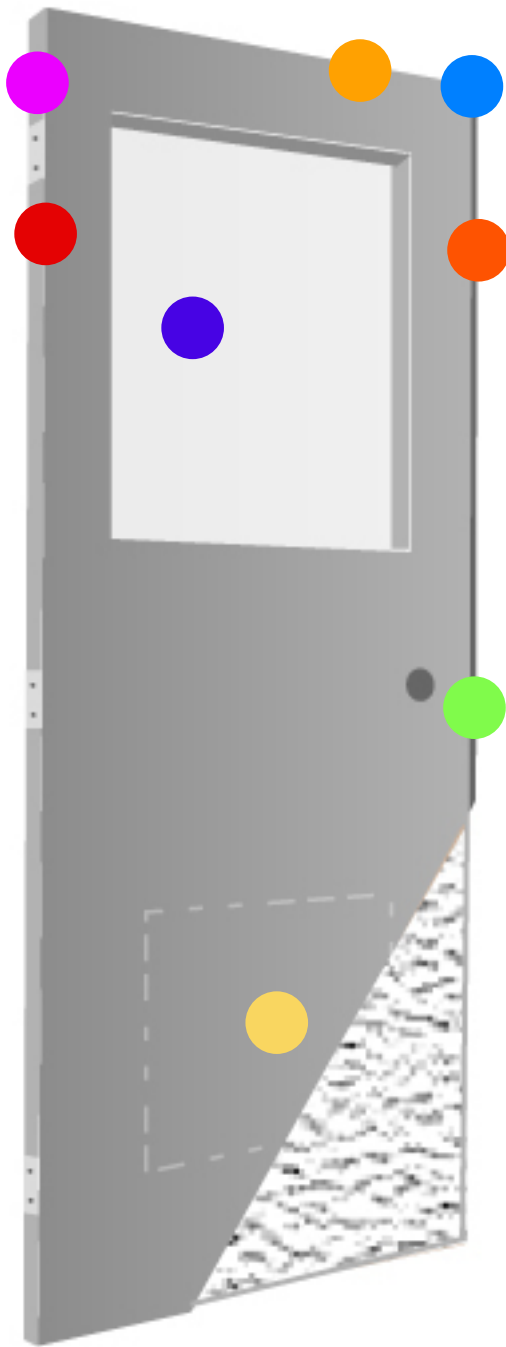

## Features

- 1 ¾" standard; also available in 1 ⅝"
- ● Most manufacturer's hinge locations
- 18-gauge A60 galvanized steel standard
- ● Continuously welded vertical edges (seamless) standard
- Rust inhibitive prime coat ANSI/SDI 250.10
- Also available as stock door

## Material Options

- 16-gauge, 14-gauge and 12-gauge steel
- G90 galvanized steel
- Stainless steel, available in 304 or 316 alloys

## Feature Options

- ● Up to 3 hour fire label
- ● Integral lite option
- ● Integral louver option
- ● Flush top cap
- ● Most manufacturer's Deadlock prep, Panic prep, and Mortise sectional trim
- ● Flat bar astragal (pairs)

## Hardware Reinforcements

- ⅜" for hinges
- 12-gauge for locks standard
- 14-gauge for closers standard
- Heavier gauge reinforcements available