


Steel Stiffened Core Doors

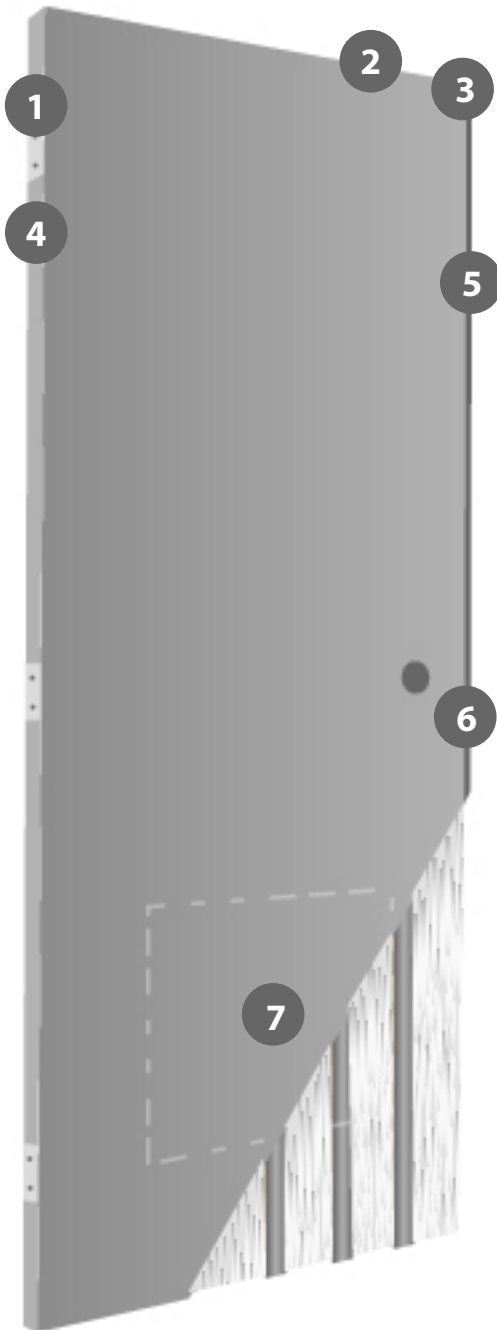

Features

- 1 3/4" standard; other thicknesses available
- ① Any manufacturer's hinge locations
- 18-gauge steel A60 galvanized standard
- 20-gauge stiffeners spot-welded at 6" on center with thermafiber insulation
- ③ Continuously welded vertical edges (seamless) standard
- Rust inhibitive prime coat ANSI/SDI 250.10-1998

Material Options

- 16-gauge, 14-gauge, 12-gauge, and 10-gauge steel
- G90 galvanized steel
- Stainless steel, available in 304 or 316 alloys
- 18-gauge stiffeners spot-welded

Feature Options

- ④ Up to 3 hour fire label
- Integral lite option (1)
- ⑦ Integral louver option (1)
- ② Flush top cap (1)
- ⑥ Any manufacturer's Deadlock prep (1), Panic prep (1), and Mortise sectional trim (1)
- ⑤ Flat bar astragal (pairs) (1)

Hardware Reinforcements

- 3/16" for hinges
- 12-gauge for locks standard
- 14-gauge for closers standard
- Heavier gauge reinforcements available

(1) *Optional feature for an additional charge*