


Tornado Resistant Doors

FEMA 361/ICC-500 Compliant

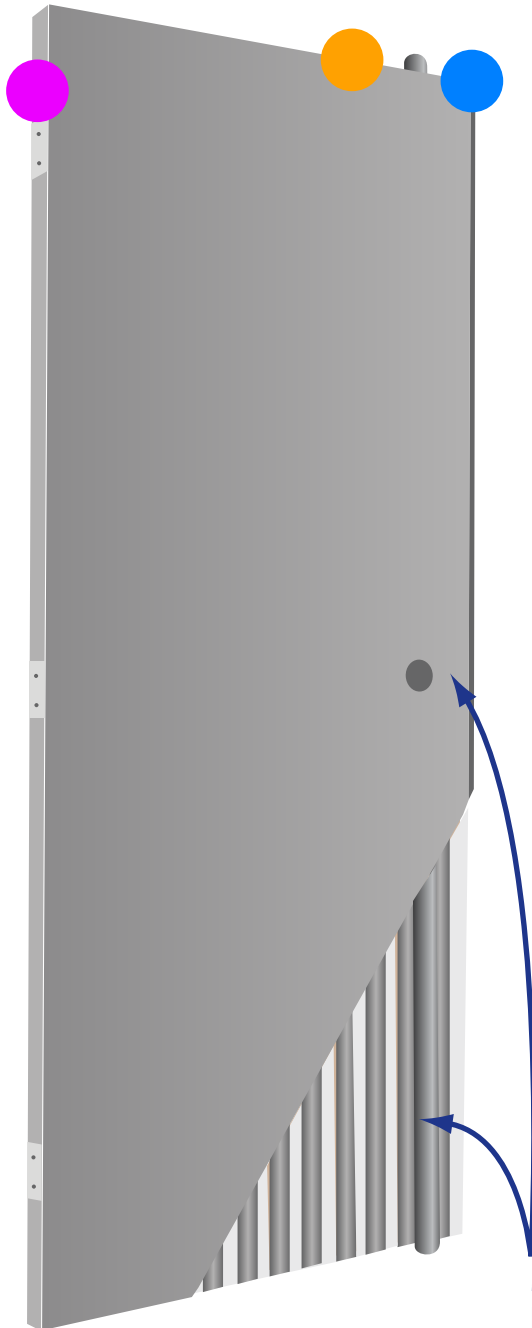

Features

- 1 ¾" standard thicknesses
- ● Any manufacturer's butt hinge
- 14-gauge steel A60 galvanized standard
- 12-gauge stiffeners spot-welded at 4" on center with fiberglass insulation
- ● Continuously welded vertical edges (seamless) standard
- Rust inhibitive prime coat ANSI/SDI 250.10
- Available up to 4'x8' singles / 8'x8' pairs
- Singles available in-swing or out-swing

Material Options

- G90 galvanized steel

Feature Options

- ● Flush top cap
- Must use with Securitech hardware

Must have multi-point latching by Securitech (not provided by Door Components). May be surface or concealed in door.