


# Borrowed Lite Frames

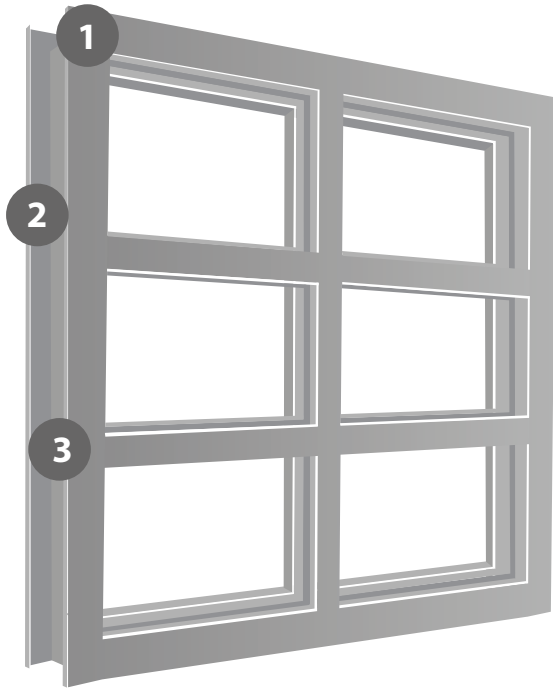

## Features

- ① Face weld
- 16-gauge A60 galvanized steel standard
- Rust-inhibitive prime coat ANSI/SDI 250.10-1998
- ② Anchors to meet all wall construction
- Any width and height
- Any jamb depth
- Available in KD Drywall or Masonry
- Glass stop 5/8" width standard. Custom sizes available
- Glazing not included

## Material Options

- 14-gauge and 12-gauge steel
- Available in Stainless Steel

## Feature Options

- ③ Up to 90 minute fire label
- Continuous weld
- TIG weld