


Bullet Resistant Frames Levels 1-8

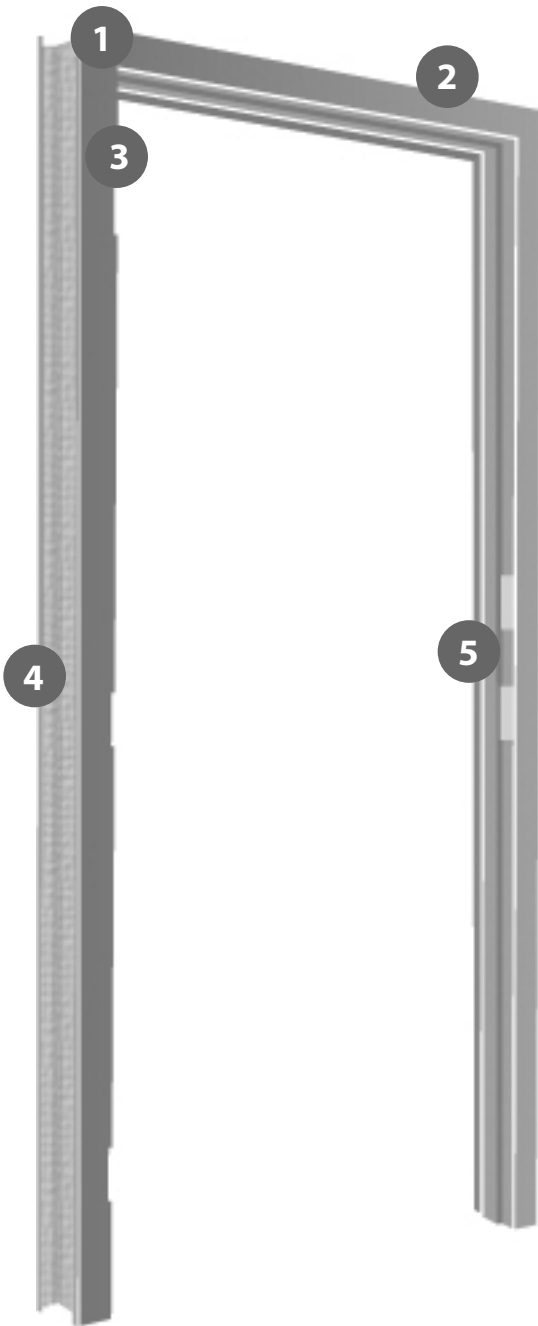

Features

- Tested in accordance with UL 752 level 1 through 8 for ballistic products
- ① Face weld
- 16-gauge A60 galvanized steel standard
- 7-gauge hinge reinforcements standard
- 12-gauge for closers standard
- Rust-inhibitive prime coat ANSI/SDI 250.10-1998
- ③ Any manufacturer's hinge locations
- ⑤ Any manufacturer's strike prep location
- ④ Anchors to meet all wall construction
- Any width and height
- Any jamb depth
- Bullet resistant doors available

Material Options

- 14-gauge and 12-gauge steel
- Available in Stainless Steel

Feature Options

- Continuous weld

Hardware Reinforcements

- ② Optional prep to accept all manufacturers' hardware requirements

THREAT LEVELS			
LEVEL	BULLET	CALIBER	SHOTS
1		9mm (124g) FMJ	3
2		.357 Magnum (158g) SP	3
3		.44 Magnum (244g) SP	3
4		.30 Caliber Rifle (180g) SP	1
5		7.62mm Rifle (150g) FMJ	1
6		9mm Multi (124g) FMJ	5
7		5.56mm Rifle (55g)	5
8		7.62 Multi Rifle (150g) FMJ	5
8 (AP)		30-06 Rifle (166g) AP	5