
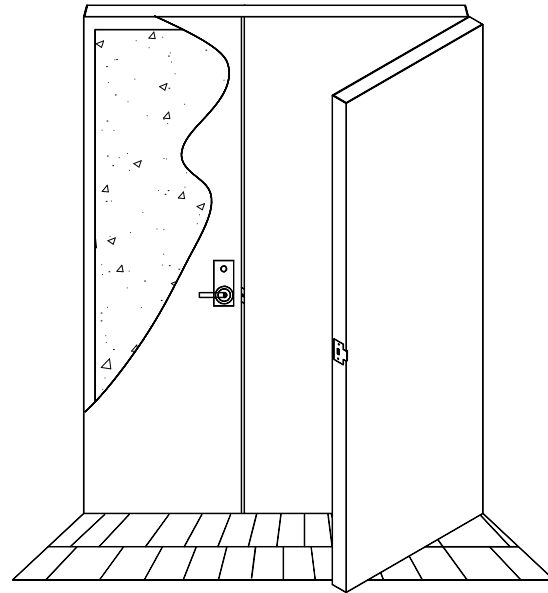


STANDARD SPECIFICATION

MATERIAL: GALVANNEAL

GAUGE: 18

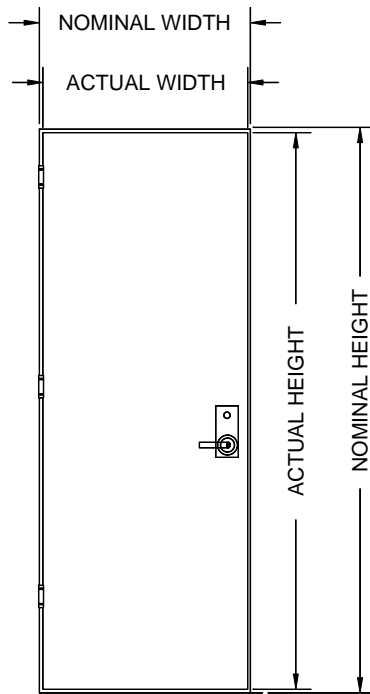

- 1.) 1-3/4" STANDARD DOOR THICKNESS.
- 2.) 16 AND 14 GAUGE AVAILABLE.
- 3.) G90 GALVANIZED AVAILABLE.
- 4.) PROPRIETARY TEMP RISE CORE PERMANENTLY BONDED TO BOTH FACE SHEETS.
- 5.) 18 GA TOP AND BOTTOM CHANNELS SPOTWELDED TO FACE SHEETS.
- 6.) CONTINUOUS WELD SEAMLESS EDGE STANDARD (OPEN SEAM AVAILABLE).
- 7.) HARDWARE REINFORCEMENTS:
 - 3/16" FOR HINGES
 - 12 GA FOR LOCKS
 - 14 GA FOR CLOSER
- 8.) 60-180 MIN WHI LABELS AVAILABLE FOR 450° AND 250° TEMP RISE AT 30 MIN.
- 9.) SIZES AVAILABLE UP TO 5'-0" x 12'-0" SINGLE SWING
10'-0" x 12'-0" PAIR SWING.

