
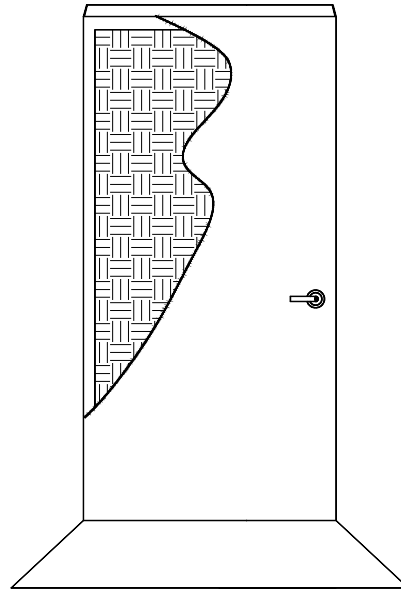


STANDARD SPECIFICATION

MATERIAL: GALVANNEAL

GAUGE: 16

UL 752 LEVELS 1 - 8 AVAILABLE

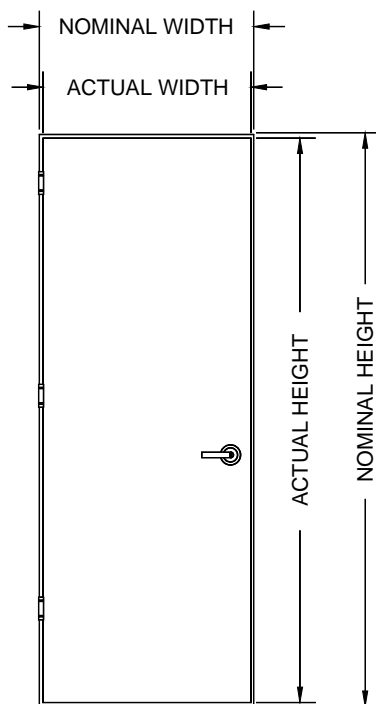

- 1.) 1-3/4" STANDARD DOOR THICKNESS.
- 2.) 14 GAUGE AVAILABLE.
- 3.) G90 GALVANIZED AVAILABLE. STAINLESS STEELS 304 AND 316 AVAILABLE IN #4-SATIN, #2B-MILL OR #8-MIRROR FINISHES.
- 4.) PROPRIETARY BULLET RESISTANT CORE.
- 5.) 18 GA FLUSH TOP AND BOTTOM CHANNELS WELDED TO FACE SHEETS.
- 6.) CONTINUOUS WELD SEAMLESS EDGE STANDARD.
- 7.) HARDWARE REINFORCEMENTS:
3/16" FOR HINGES
12 GA FOR LOCKS
14 GA FOR CLOSER
- 8.) SIZES AVAILABLE UP TO 4'-0" x 8'-0" SINGLE SWING.
- 9.) LEVELS I - III
APPROXIMATELY 9 LBS/SQ FT
LITES AVAILABLE UP TO 100 SQ INCHES (GLASS BY OTHERS)
CYLINDRICAL LOCKS, MORTISE LOCKS, SURFACE MOUNTED AND MORTISE EXIT HARDWARE AVAILABLE
- 10.) LEVELS IV - VIII
APPROXIMATELY 22 LBS/SQ FT
FLUSH DOORS
CYLINDRICAL LOCKS OR SURFACE MOUNTED EXIT HARDWARE AVAILABLE

