


**STANDARD SPECIFICATION**

MATERIAL: GALVANNEAL

GAUGE: 18

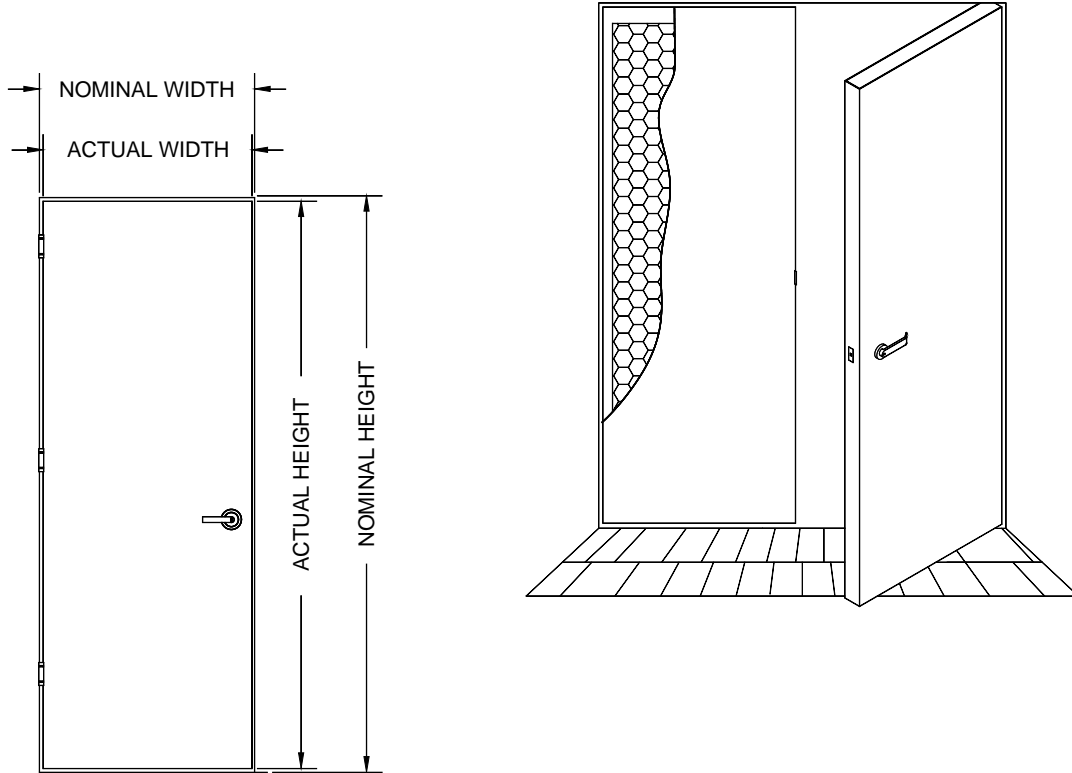

- 1.) 1-3/4" STANDARD DOOR THICKNESS, OTHER THICKNESSES AVAILABLE.
- 2.) 16, 14 AND 12 GAUGE AVAILABLE.
- 3.) G90 GALVANIZED AVAILABLE. STAINLESS STEELS 304 AND 316 AVAILABLE IN #4-SATIN, #2B-MILL OR #8-MIRROR FINISHES.
- 4.) 1" HONEYCOMB HEX CELLS PERMANENTLY BONDED TO BOTH FACE SHEETS. IMPACT RESISTANT (HONEYCOMB IS CRUSH RESISTANT TO 45 PSI).
- 5.) RESIN IMPREGNATED HONEYCOMB OPTIONAL
- 6.) 18 GA TOP AND BOTTOM CHANNELS SPOTWELDED TO FACE SHEETS.
- 7.) CONTINUOUS WELD SEAMLESS EDGE (STANDARD FOR MILD STEEL - OPEN SEAM AVAILABLE).  
OPEN SEAM EDGE (STANDARD FOR STAINLESS STEEL - SEAMLESS AVAILABLE).
- 8.) HARDWARE REINFORCEMENTS:  
3/16" FOR HINGES  
12 GA FOR LOCKS  
14 GA FOR CLOSER
- 9.) WHI LABELS AVAILABLE

