

Honeycomb Core Doors

Standard Features

- 1 3/4" standard; other thicknesses available
- Any manufacturer's hinge locations
- 18-gauge A40 galvanized steel standard
- ANSI A250.8 Model 2, continuously welded vertical edges (seamless) standard
- Rust inhibitive prime coat meets ANSI/SDI A250.10
- Exceeds ANSI A250.4 Performance Level A, tested to 10 million cycles
- Standard 3070 door meets blast resistant GSA Level C (4 PSI/28psi-msec)*, no additional charge
- 1" honeycomb hex cells permanently bonded to both face sheets

Material Options


- 16-gauge, 14-gauge
- A60, G90, CRS
- Stainless steel available in 304 or 316 alloys

Feature Options

- Channeled lite cutout or integral lite option
- Flush top cap
- Any manufacturer's deadlock prep, panic prep, and mortise sectional trim
- Flat bar astragal (pairs)
- Up to 3 hr fire label
- Integral louver option

Hardware Reinforcements

- 3/16" for hinges
- 12-gauge for locks standard
- 14-gauge for closers standard
- Heavier gauge reinforcements available

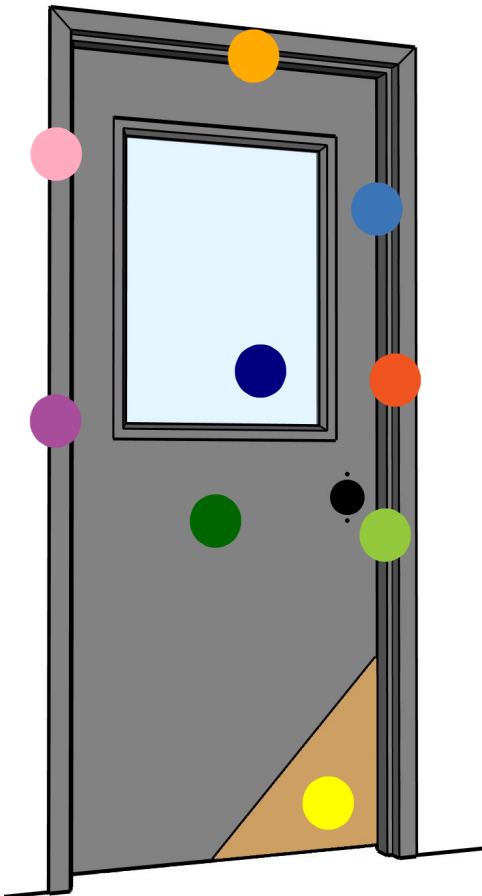

**Commercial Grade 1 lockset and hinges required for blast resistant door.*