



## STANDARD SPECIFICATION

MATERIAL: GALVANNEAL

GAUGE: 18

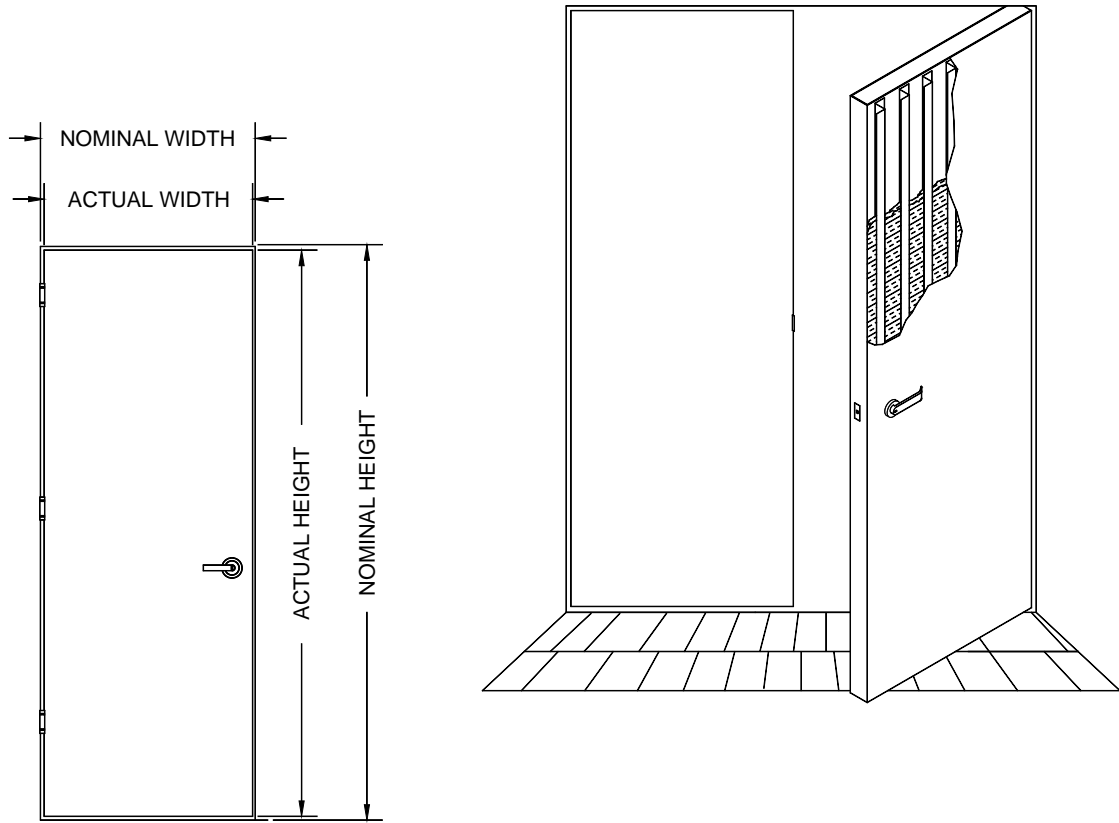


- 1.) 1-3/4" STANDARD DOOR THICKNESS, OTHER THICKNESSES AVAILABLE.
- 2.) 16, 14, 12 AND 10 GAUGE AVAILABLE.
- 3.) G90 GALVANIZED AVAILABLE. STAINLESS STEELS 304 AND 316 AVAILABLE IN #4-SATIN, #2B-MILL OR #8-MIRROR FINISHES.
- 4.) 20 GA STIFFENERS 6" ON CENTER WITH FIBERGLASS INSULATION BETWEEN. (OTHER GAUGES AVAILABLE)
- 5.) 18 GA TOP AND BOTTOM CHANNELS SPOTWELDED TO FACE SHEETS. (OTHER GAUGES AVAILABLE)
- 6.) CONTINUOUS WELD SEAMLESS EDGE (STANDARD FOR MILD STEEL - OPEN SEAM AVAILABLE).  
OPEN SEAM EDGE (STANDARD FOR STAINLESS STEEL - SEAMLESS AVAILABLE).
- 7.) HARDWARE REINFORCEMENTS:  
3/16" FOR HINGES  
12 GA FOR LOCKS  
14 GA FOR CLOSER
- 8.) WHI LABELS AVAILABLE

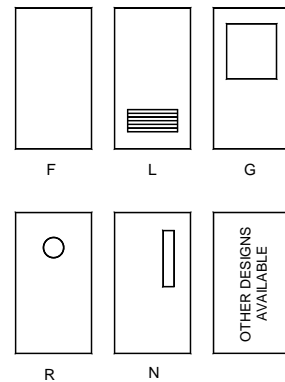

## STANDARD SPECIFICATION

MATERIAL: GALVANNEAL

GAUGE: 18

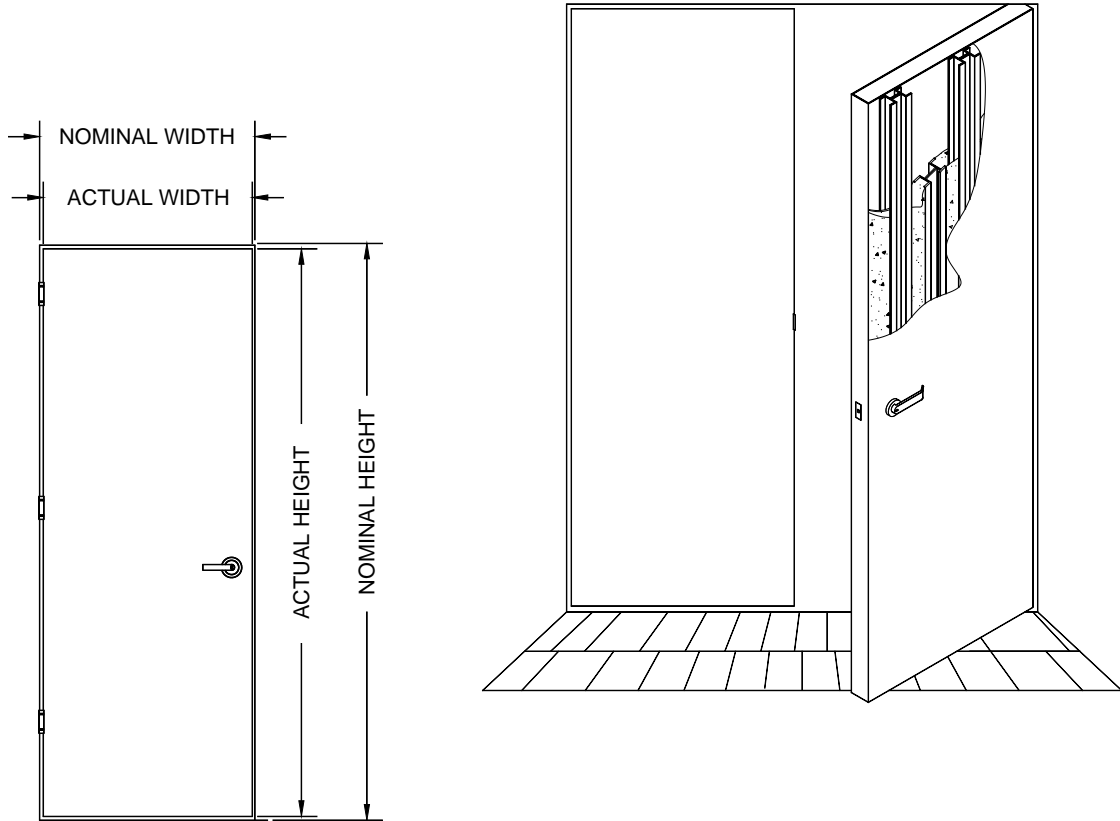

- 1.) 1-3/4" STANDARD DOOR THICKNESS, OTHER THICKNESSES AVAILABLE.
- 2.) 16, 14, 12 AND 10 GAUGE AVAILABLE.
- 3.) G90 GALVANIZED AVAILABLE. STAINLESS STEELS 304 AND 316 AVAILABLE IN #4-SATIN, #2B-MILL OR #8-MIRROR FINISHES.
- 4.) 20 GA STIFFENERS 6" ON CENTER WITH FIBERGLASS INSULATION BETWEEN. (OTHER GAUGES AVAILABLE)
- 5.) 18 GA TOP AND BOTTOM CHANNELS SPOTWELDED TO FACE SHEETS. (OTHER GAUGES AVAILABLE)
- 6.) CONTINUOUS WELD SEAMLESS EDGE (STANDARD FOR MILD STEEL - OPEN SEAM AVAILABLE).  
OPEN SEAM EDGE (STANDARD FOR STAINLESS STEEL - SEAMLESS AVAILABLE).
- 7.) HARDWARE REINFORCEMENTS:  
3/16" FOR HINGES  
12 GA FOR LOCKS  
14 GA FOR CLOSER
- 8.) WHI LABELS AVAILABLE

