


Masonry Frames

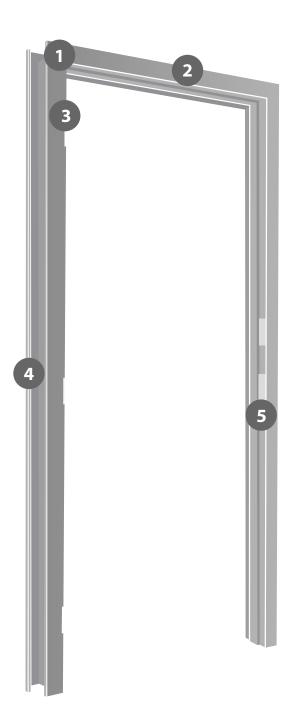

Features

- Tace weld
- 16-gauge A60 galvannealed steel standard
- 7-gauge hinge reinforcements standard
- 12-gauge for closers standard
- Rust-inhibitive prime coat ANSI/SDI 250.10
- 3 Any manufacturer's hinge locations
- 6 Any manufacturer's strike prep location
- Anchors to meet all wall construction
- Any width and height
- Any jamb depth

Material Options

- 14-gauge and 12-gauge steel
- Available in Stainless Steel

Feature Options

Continuous weld

Hardware Reinforcements

• 2 Optional prep to accept all manufacturers' hardware requirements