Pair Doors

QTY	MARK NUMBER	SWING	THICK.	FRAME OPENING SIZE WIDTH (IN)	FRAME OPENING SIZE HEIGHT (IN)	LABEL MINUTES
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None

Material: A40 * Core Type: Honeycomb * Gauge: 18G *

All fields marked with an asterisk are prepopulated to DCI standards.

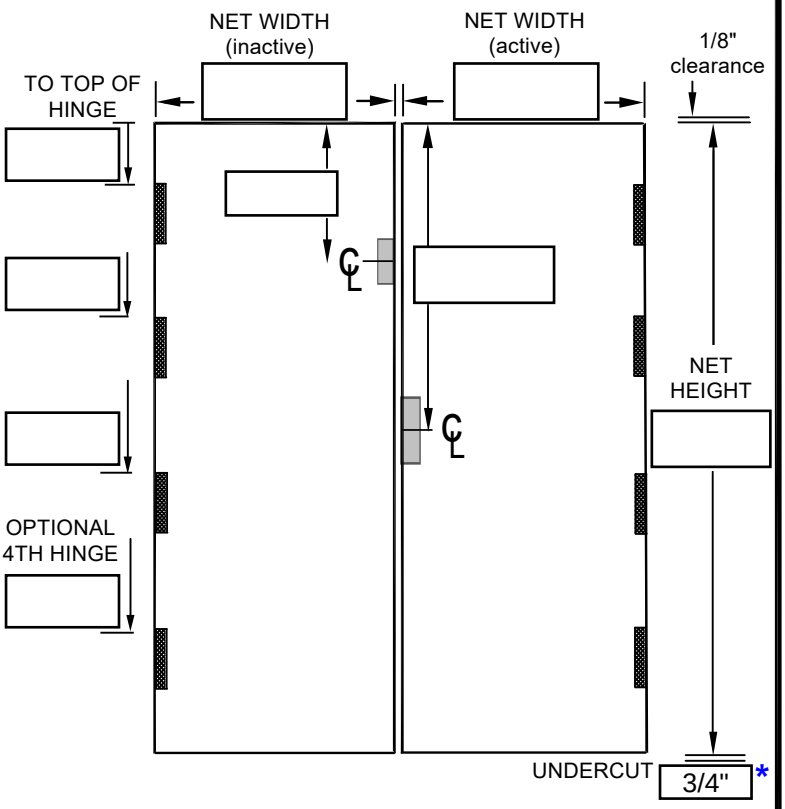

Cutout Options

Active ☐ **Inactive** ☐ **None** ☐

Cut Out Only ☐ SIZE WIDTH HEIGHT

LOCATION:
CENTERED ☐ TOP OF DOOR TO TOP OF CUTOUT LOCK EDGE TO CUTOUT

Integral Lite ☐ VISIBLE GLASS SIZE WIDTH HEIGHT

GLASS THICKNESS: GLASS STOP: PUSH SIDE ○ PULL SIDE ○

LOCATION:
CENTERED ☐ TOP OF DOOR TO TOP OF VISIBLE GLASS LOCK EDGE TO VISIBLE GLASS

Louver

INTEGRAL ☐ CUT OUT ONLY ☐ SIZE WIDTH HEIGHT

LOCATION:
CENTERED ☐ BOTTOM OF DOOR TO BOTTOM OF LOUVER LOCK EDGE TO LOUVER

DCI integral louvers ***cannot*** be used in fire rated doors.
For more information on the use of cutouts in fire rated doors please reference the DCI Technical Manual.

DOOR EDGE: Seamless *

TOP CHANNEL	BOTTOM CHANNEL
RECESSED ◉	RECESSED ◉
FLUSH ○	FLUSH ○
FLUSH AND SEALED ○	FLUSH AND SEALED ○

LOCK EDGE: BEVELED ◉ SQUARE ○
HINGE EDGE: BEVELED ◉ SQUARE ○

HINGE LOCATIONS: New DCI * BACKSET: 1/4" *
HINGE TYPE: 4.5" * STD WEIGHT ○ HEAVY WEIGHT ○
HINGE DETAILS:

ASTRAGAL: None WELDED ○ SHIPPED LOOSE ○

ACTIVE LEAF		INACTIVE LEAF	
LOCK/EXIT DEVICE:		LOCK/EXIT DEVICE:	
EXIT DEVICE TRIM:		FLUSH BOLT:	

NOTE: All doors include door closer reinforcement.
OTHER DETAILS:

HOLLOW METAL ON DEMAND
www.dcihollowmetal.com

COMPANY NAME : PO NUMBER :
JOB NAME : PAGE OF

Pair Doors

QTY	MARK NUMBER	SWING	THICK.	FRAME OPENING SIZE WIDTH (IN)	FRAME OPENING SIZE HEIGHT (IN)	LABEL MINUTES
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None

Material: A40 * Core Type: Honeycomb * Gauge: 18G *

All fields marked with an asterisk are prepopulated to DCI standards.

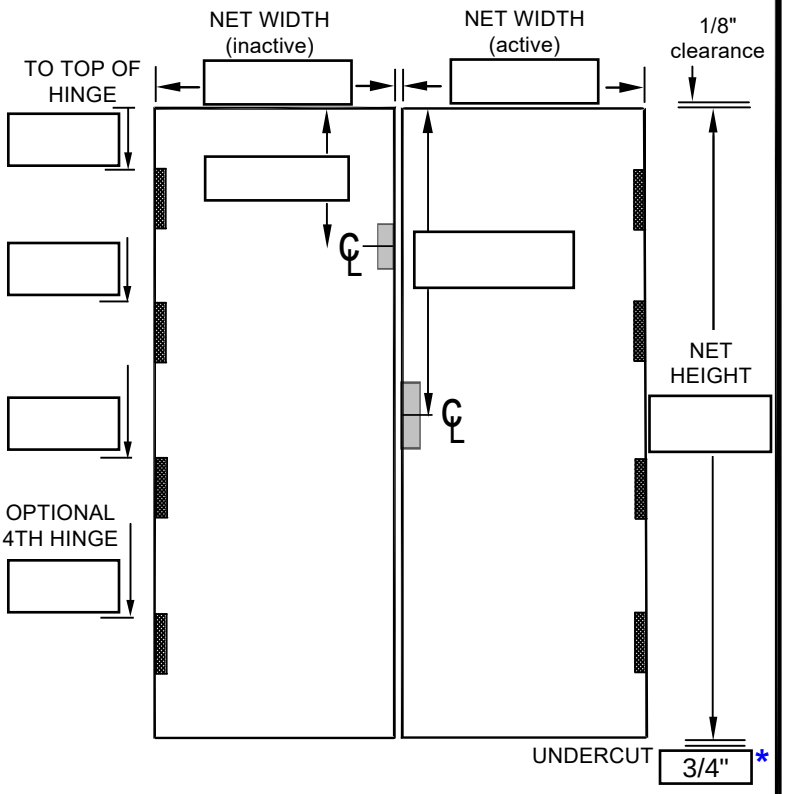

Cutout Options

Active ☐ **Inactive** ☐ **None** ☐

Cut Out Only ☐ SIZE WIDTH HEIGHT

LOCATION:
CENTERED ☐ TOP OF DOOR TO TOP OF CUTOUT LOCK EDGE TO CUTOUT

Integral Lite ☐ VISIBLE GLASS SIZE WIDTH HEIGHT

GLASS THICKNESS: GLASS STOP: PUSH SIDE ○ PULL SIDE ○

LOCATION:
CENTERED ☐ TOP OF DOOR TO TOP OF VISIBLE GLASS LOCK EDGE TO VISIBLE GLASS

Louver

INTEGRAL ☐ CUT OUT ONLY ☐ SIZE WIDTH HEIGHT

LOCATION:
CENTERED ☐ BOTTOM OF DOOR TO BOTTOM OF LOUVER LOCK EDGE TO LOUVER

DCI integral louvers ***cannot*** be used in fire rated doors.
For more information on the use of cutouts in fire rated doors please reference the DCI Technical Manual.

DOOR EDGE: Seamless *

TOP CHANNEL	BOTTOM CHANNEL
RECESSED ◉	RECESSED ◉
FLUSH ○	FLUSH ○
FLUSH AND SEALED ○	FLUSH AND SEALED ○

LOCK EDGE: BEVELED ◉ SQUARE ○
HINGE EDGE: BEVELED ◉ SQUARE ○

HINGE LOCATIONS: New DCI * BACKSET: 1/4" *
HINGE TYPE: 4.5" * STD WEIGHT ○ HEAVY WEIGHT ○
HINGE DETAILS:

ASTRAGAL: None WELDED ○ SHIPPED LOOSE ○

ACTIVE LEAF		INACTIVE LEAF	
LOCK/EXIT DEVICE:		LOCK/EXIT DEVICE:	
EXIT DEVICE TRIM:		FLUSH BOLT:	

NOTE: All doors include door closer reinforcement.
OTHER DETAILS:

HOLLOW METAL ON DEMAND
www.dcihollowmetal.com

COMPANY NAME : PO NUMBER :
JOB NAME : PAGE OF

Pair Doors

QTY	MARK NUMBER	SWING	THICK.	FRAME OPENING SIZE WIDTH (IN)	FRAME OPENING SIZE HEIGHT (IN)	LABEL MINUTES
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None

Material: A40 * Core Type: Honeycomb * Gauge: 18G *

All fields marked with an asterisk are prepopulated to DCI standards.

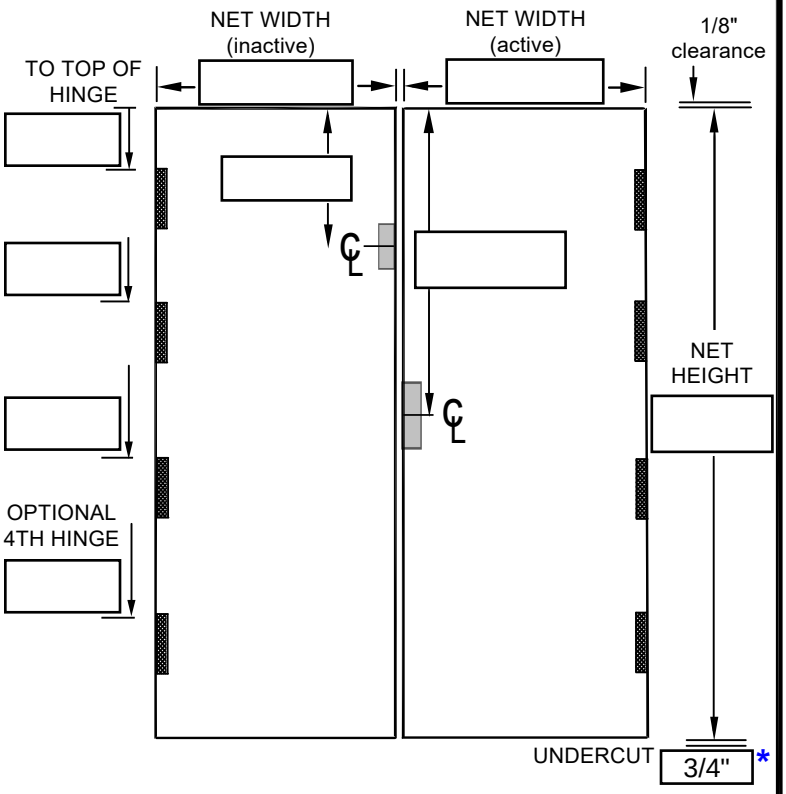

Cutout Options

Active ☐ **Inactive** ☐ **None** ☐

Cut Out Only ☐ SIZE WIDTH HEIGHT

LOCATION:
CENTERED ☐ TOP OF DOOR TO TOP OF CUTOUT LOCK EDGE TO CUTOUT

Integral Lite ☐ VISIBLE GLASS SIZE WIDTH HEIGHT

GLASS THICKNESS: GLASS STOP: PUSH SIDE ◯ PULL SIDE ◯

LOCATION:
CENTERED ☐ TOP OF DOOR TO TOP OF VISIBLE GLASS LOCK EDGE TO VISIBLE GLASS

Louver

INTEGRAL ◯ CUT OUT ONLY ◯ SIZE WIDTH HEIGHT

LOCATION:
CENTERED ☐ BOTTOM OF DOOR TO BOTTOM OF LOUVER LOCK EDGE TO LOUVER

DCI integral louvers ***cannot*** be used in fire rated doors.
For more information on the use of cutouts in fire rated doors please reference the DCI Technical Manual.

DOOR EDGE: Seamless *

TOP CHANNEL	BOTTOM CHANNEL
RECESSED ◉	RECESSED ◉
FLUSH ◯	FLUSH ◯
FLUSH AND SEALED ◯	FLUSH AND SEALED ◯

LOCK EDGE: BEVELED ◉ SQUARE ◯

HINGE EDGE: BEVELED ◉ SQUARE ◯

HINGE LOCATIONS: New DCI * BACKSET: 1/4" *

HINGE TYPE: 4.5" * STD WEIGHT ◯ HEAVY WEIGHT ◯

HINGE DETAILS:

ASTRAGAL: None WELDED ◯ SHIPPED LOOSE ◯

ACTIVE LEAF		INACTIVE LEAF	
LOCK/EXIT DEVICE:		LOCK/EXIT DEVICE:	
EXIT DEVICE TRIM:		FLUSH BOLT:	

NOTE: All doors include door closer reinforcement.

OTHER DETAILS:

HOLLOW METAL ON DEMAND
www.dcihollowmetal.com

COMPANY NAME : PO NUMBER :

JOB NAME : PAGE OF