


Single Door						
QTY	MARK NUMBER	UY Ø	THICK.	FRAME OPENING SIZE		
				Y Ø	P Ø	T Ø

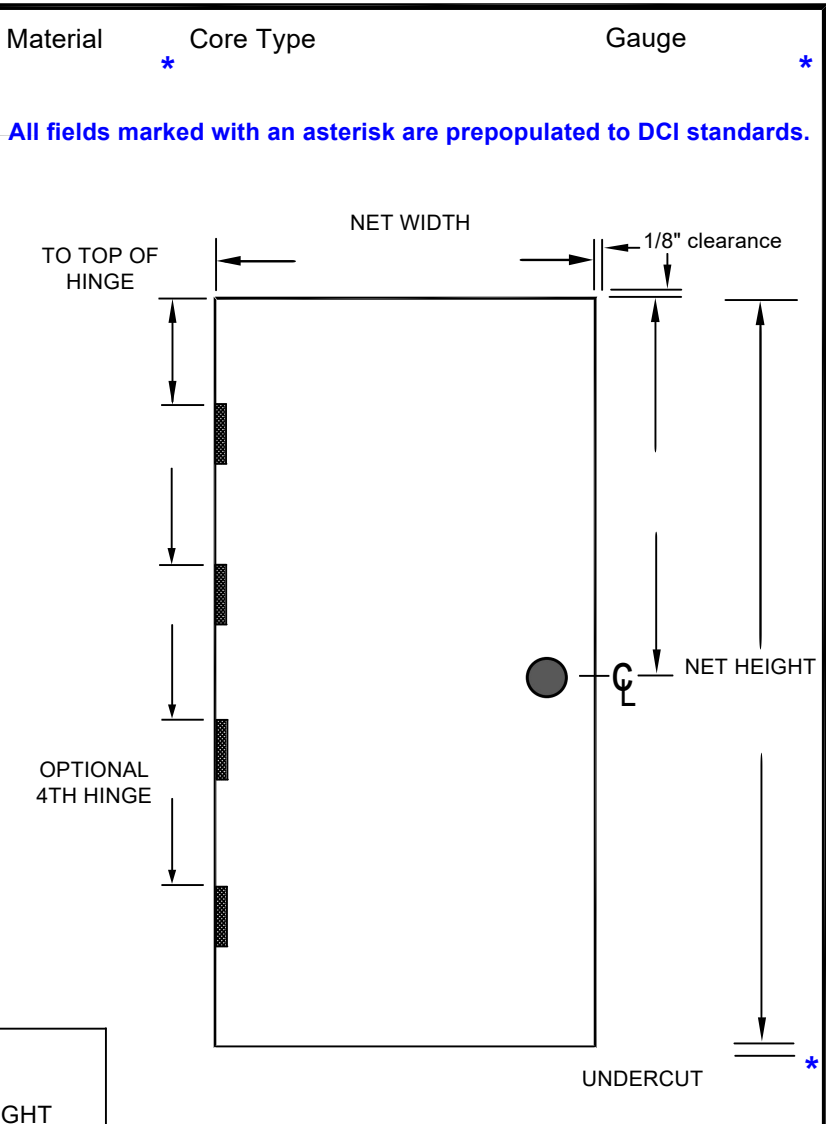

Cutout Options

Cut Out Only

SIZE

LOCATION: WIDTH HEIGHT

CENTERED TOP OF DOOR TO TOP OF CUTOUT LOCK EDGE TO CUTOUT

Integral Lite

VISIBLE GLASS SIZE

GLASS THICKNESS: GLASS STOP: PUSH SIDE PULL SIDE

LOCATION: WIDTH HEIGHT

CENTERED TOP OF DOOR TO TOP OF VISIBLE GLASS LOCK EDGE TO VISIBLE GLASS

Louver

INTEGRAL SIZE

CUT OUT ONLY WIDTH HEIGHT

LOCATION: WIDTH HEIGHT

CENTERED BOTTOM OF DOOR TO BOTTOM OF LOUVER LOCK EDGE TO LOUVER

DCI integral louvers cannot be used in fire rated doors.
 For more information on the use of cutouts in fire rated doors please reference the [DCI Technical Manual](#).

DOOR EDGE *	LOCK EDGE
TOP CHANNEL	BEVELED
BOTTOM CHANNEL	SQUARE
HINGE EDGE	
HINGE LOCATIONS	* BACKSET *
HINGE TYPE	* STD WEIGHT
HINGE DETAILS:	HEAVY WEIGHT
LOCK/EXIT DEVICE:	
NOTE: All doors include door closer reinforcement.	
OTHER DETAILS:	

