3-Sided Frame - Single Lead Lined

QTY	MARK NUMBER	SWING	DIMENSIONS WIDTH(IN)	DIMENSIONS HEIGHT(IN)	LABEL MINUTES
					None
					None
					None
					None
					None
					None
					None
					None

Material * A40

Construction * Face Weld

Gauge * 16G

Lead (lbs per sq. ft.)

All fields marked with an asterisk are prepopulated to DCI standards.

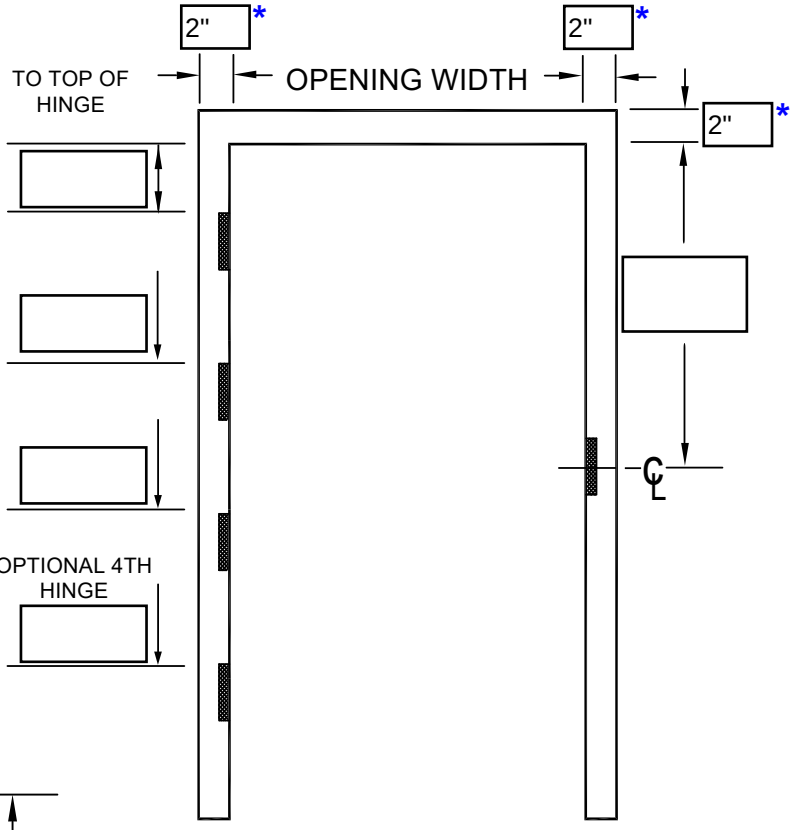

Lead Location

Door Side ○

Opposite Door Side ○

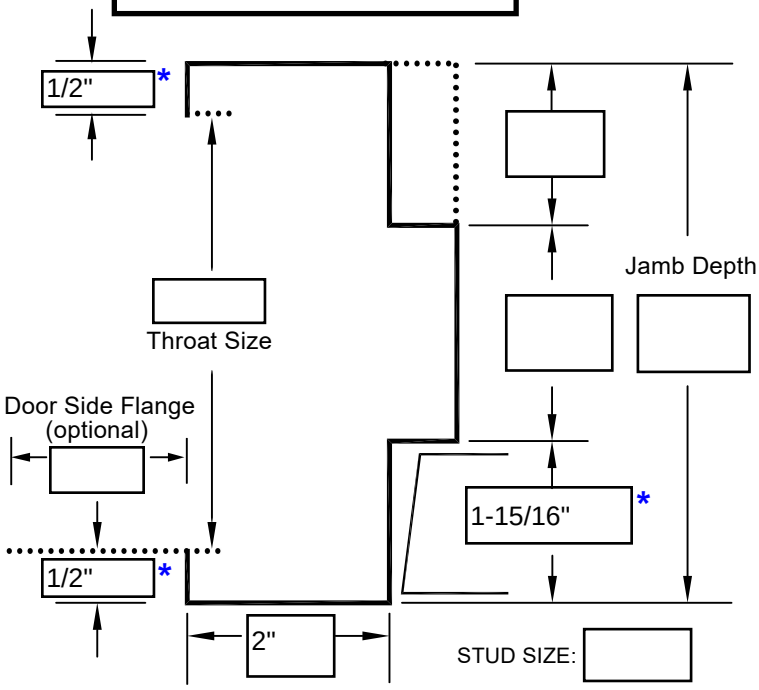

HINGE LOCATIONS * New DCI

BACKSET * 11/32

HINGE TYPE * 4.5"

STD WEIGHT ○

HINGE DETAILS:

HEAVY WEIGHT ○

STRIKE TYPE: ASA (4-7/8")

SILENCERS: ☐

STRIKE DETAILS:

NOTE: All frames include door closer reinforcement. All welded frames include A4 standard base anchors. Concealed closers, concealed overhead stops, concealed hold opens, concealed vertical rods, and mortise door bottoms **CANNOT** be used in lead lined doors.

OTHER DETAILS:

ANCHOR TYPE:

For a full description of all DCI anchor types, please refer to our Technical Data Manual.

All stud anchors will be spaced for 5/8" wall board penetration unless otherwise noted.

HOLLOW METAL ON DEMAND

www.dcihollowmetal.com

COMPANY NAME :

PO NUMBER :

JOB NAME :

PAGE

OF

3-Sided Frame - Single Lead Lined

QTY	MARK NUMBER	SWING	DIMENSIONS WIDTH(IN)	DIMENSIONS HEIGHT(IN)	LABEL MINUTES
					None
					None
					None
					None
					None
					None
					None
					None

Material * A40

Construction * Face Weld

Gauge * 16G

Lead (lbs per sq. ft.)

All fields marked with an asterisk are prepopulated to DCI standards.

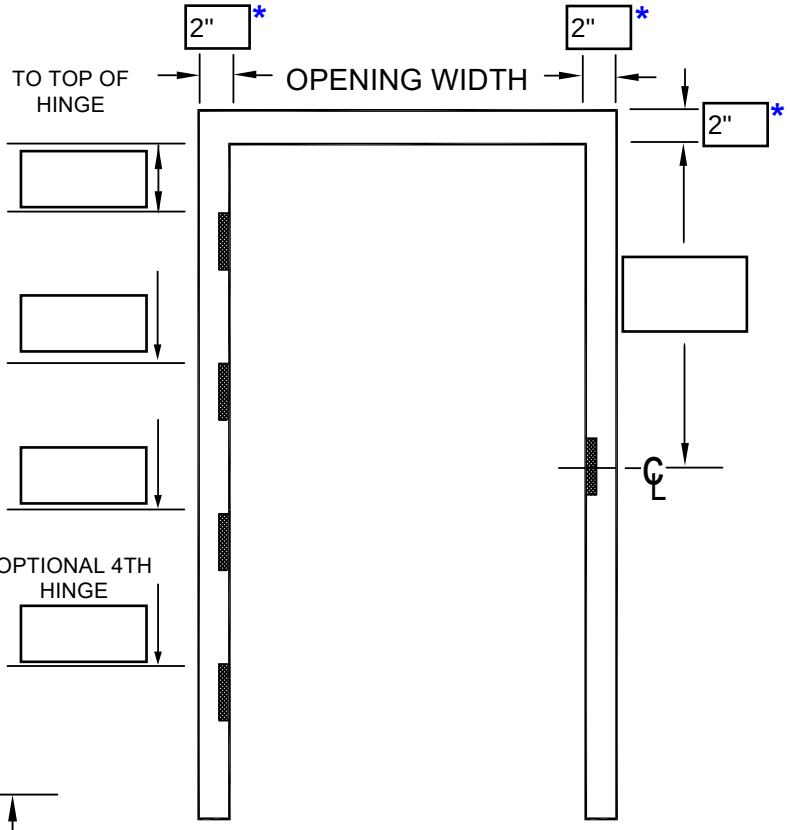

Lead Location

Door Side ○

Opposite Door Side ○

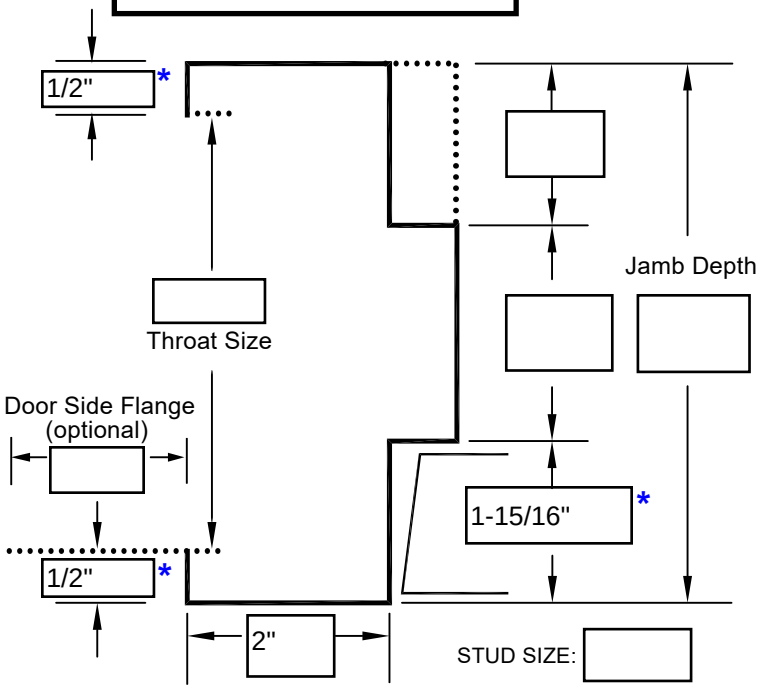

HINGE LOCATIONS * New DCI

BACKSET * 11/32

HINGE TYPE * 4.5"

STD WEIGHT ○

HINGE DETAILS:

HEAVY WEIGHT ○

STRIKE TYPE: ASA (4-7/8")

SILENCERS: ☐

STRIKE DETAILS:

NOTE: All frames include door closer reinforcement. All welded frames include A4 standard base anchors. Concealed closers, concealed overhead stops, concealed hold opens, concealed vertical rods, and mortise door bottoms **CANNOT** be used in lead lined doors.

OTHER DETAILS:

ANCHOR TYPE:

For a full description of all DCI anchor types, please refer to our Technical Data Manual.

All stud anchors will be spaced for 5/8" wall board penetration unless otherwise noted.

HOLLOW METAL ON DEMAND

www.dcihollowmetal.com

COMPANY NAME :

PO NUMBER :

JOB NAME :

PAGE

OF

3-Sided Frame - Single Lead Lined

QTY	MARK NUMBER	SWING	DIMENSIONS WIDTH(IN)	DIMENSIONS HEIGHT(IN)	LABEL MINUTES
					None
					None
					None
					None
					None
					None
					None
					None

Material: A40 *

Construction: Face Weld *

Gauge: 16G *

Lead (lbs per sq. ft.):

All fields marked with an asterisk are prepopulated to DCI standards.

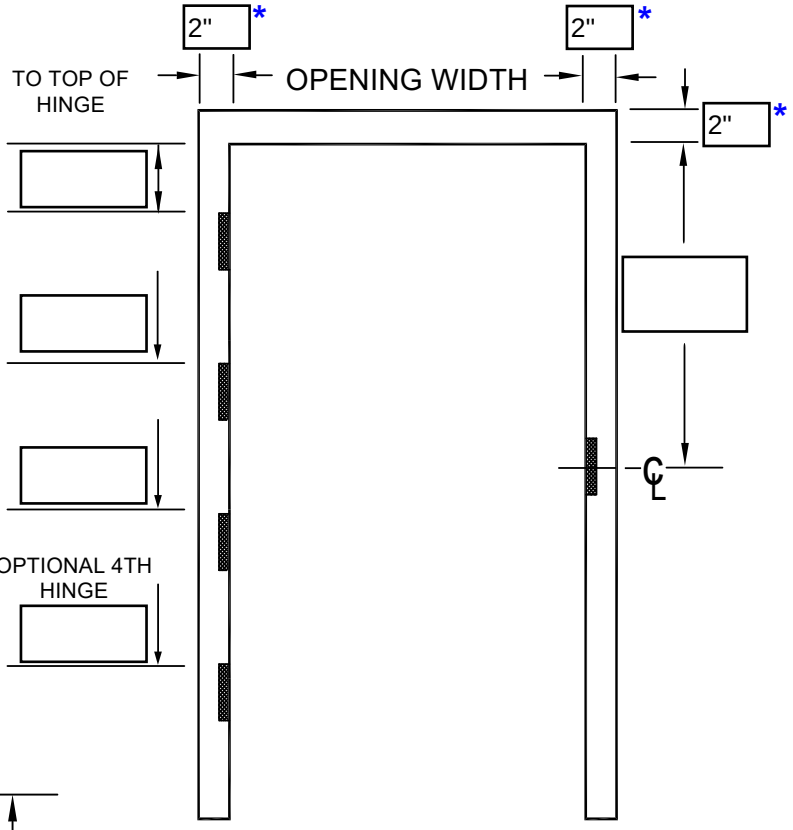

Lead Location

Door Side ○

Opposite Door Side ○

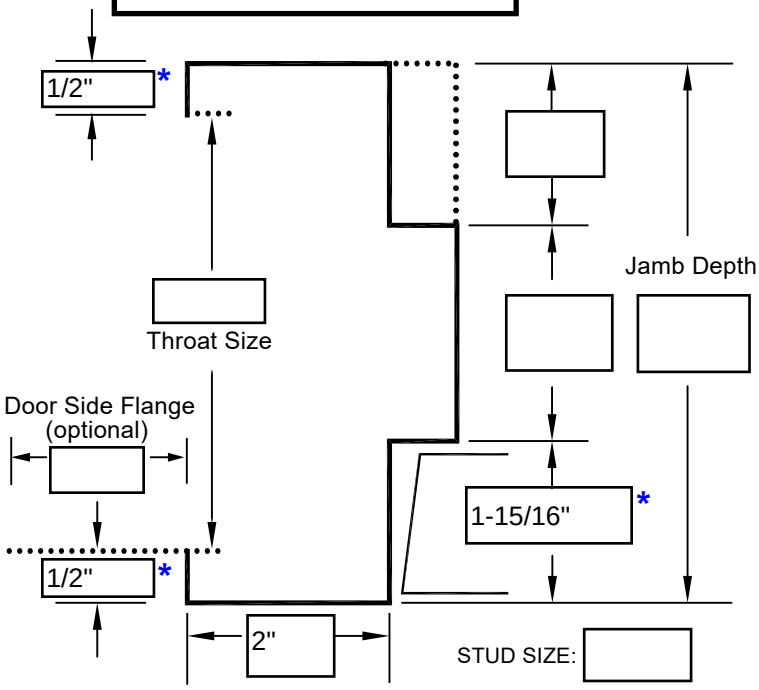

HINGE LOCATIONS: New DCI * BACKSET: 11/32 *

HINGE TYPE: 4.5" *

HINGE DETAILS:

STD WEIGHT ○

HEAVY WEIGHT ○

STRIKE TYPE: ASA (4-7/8")

STRIKE DETAILS:

SILENCERS: ☐

NOTE: All frames include door closer reinforcement. All welded frames include A4 standard base anchors. Concealed closers, concealed overhead stops, concealed hold opens, concealed vertical rods, and mortise door bottoms **CANNOT** be used in lead lined doors.

OTHER DETAILS:

ANCHOR TYPE:

For a full description of all DCI anchor types, please refer to our Technical Data Manual.

All stud anchors will be spaced for 5/8" wall board penetration unless otherwise noted.

HOLLOW METAL ON DEMAND

www.dcihollowmetal.com

COMPANY NAME :

PO NUMBER :

JOB NAME :

PAGE

OF