


### Flush Frame

Material \* Construction \* Gauge \*


All fields marked with an asterisk are prepopulated to DCI standards.

QTY	MARK NUMBER	Ø	Ø	Ø	Ø

Flush Frame Limitations				
Jamb Depth	Non-Rated Frames		Fire-Rated Frames	
	Minimum	3-3/4"	Minimum	6-1/4"
Maximum	9-1/2"	Maximum	9-1/2"	
Opening Size	Single	48" x 120"	Single Only	48" x 96"
	Pair	96" x 120"		
Face Dimension	Minimum	2"	2" Only	

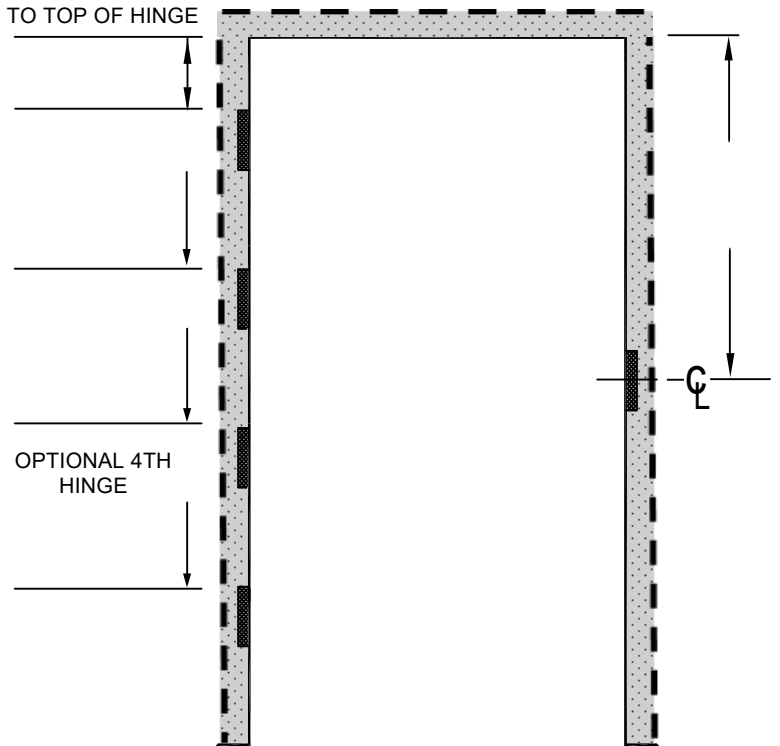

Double rabbet profile only.

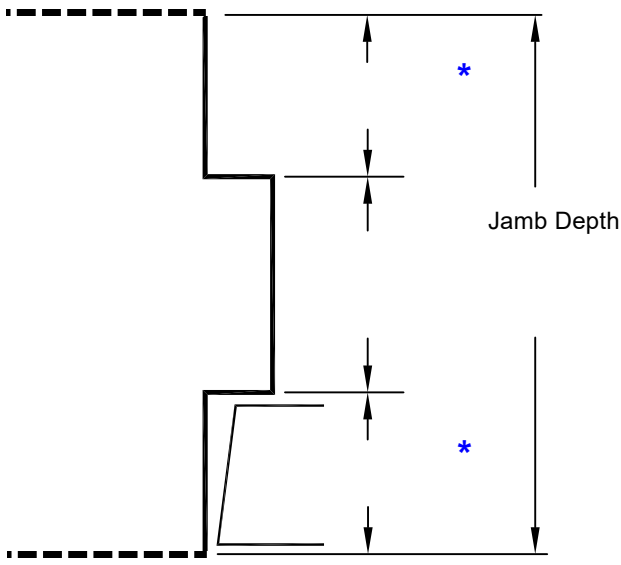

WALL SIZE:

Add 1/4" to wall thickness to obtain correct jamb depth.

HINGE LOCATIONS \* BACKSET \*

HINGE TYPE \* STD WEIGHT HEAVY WEIGHT

HINGE DETAILS:

STRIKE TYPE:

STRIKE DETAILS:

SILENCERS:

**NOTE:** Concealed OH Stop/Holder permitted, PA arm closer only, concealed closers not recommended.

**OTHER DETAILS:**



COMPANY NAME :

PO NUMBER :

JOB NAME :

PAGE OF


### Flush Frame

Material \* Construction \* Gauge \*


All fields marked with an asterisk are prepopulated to DCI standards.

QTY	MARK NUMBER	Ø	Ø	Ø	Ø

Flush Frame Limitations					
Jamb Depth	Non-Rated Frames		Fire-Rated Frames		
	Minimum	3-3/4"	Minimum	6-1/4"	
Maximum	9-1/2"	Maximum	9-1/2"		
Opening Size	Single	48" x 120"	Single Only	48" x 96"	
	Pair	96" x 120"			
Face Dimension	Minimum	2"	2" Only		

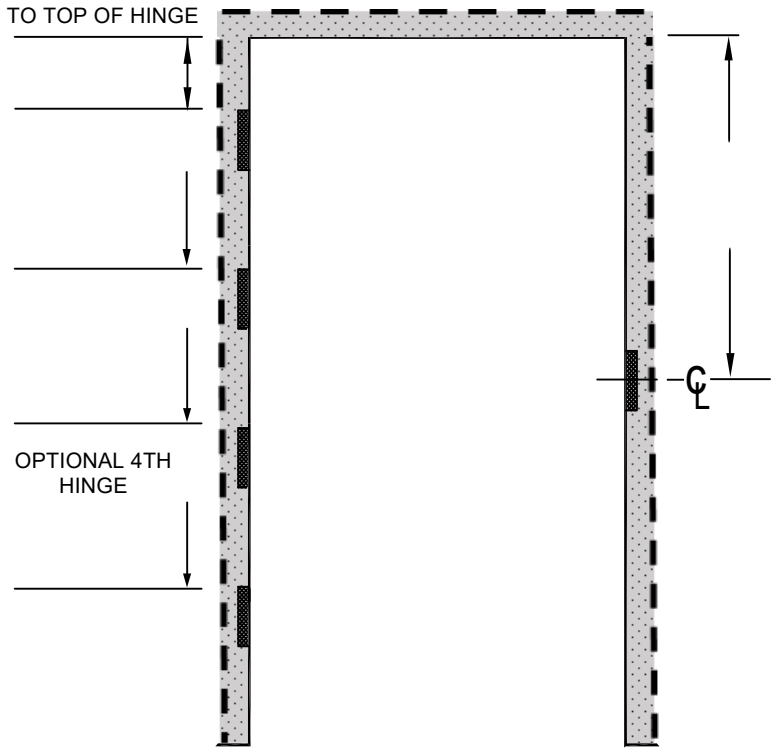

Double rabbet profile only.

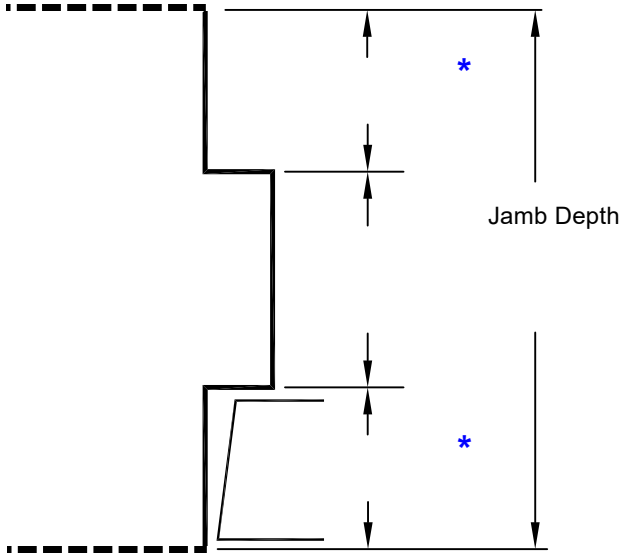

WALL SIZE:

Add 1/4" to wall thickness to obtain correct jamb depth.

HINGE LOCATIONS \* BACKSET \*

HINGE TYPE \* STD WEIGHT HEAVY WEIGHT

HINGE DETAILS:

STRIKE TYPE:

STRIKE DETAILS:

SILENCERS:

**NOTE:** Concealed OH Stop/Holder permitted, PA arm closer only, concealed closers not recommended.

**OTHER DETAILS:**



COMPANY NAME :

PO NUMBER :

JOB NAME :

PAGE OF


### Flush Frame

Material \* Construction \* Gauge \*


All fields marked with an asterisk are prepopulated to DCI standards.

QTY	MARK NUMBER	Ø	Ø	Ø	Ø

Flush Frame Limitations				
Jamb Depth	Non-Rated Frames		Fire-Rated Frames	
	Minimum	3-3/4"	Minimum	6-1/4"
Maximum	9-1/2"	Maximum	9-1/2"	
Opening Size	Single	48" x 120"	Single Only	48" x 96"
	Pair	96" x 120"		
Face Dimension	Minimum	2"	2" Only	

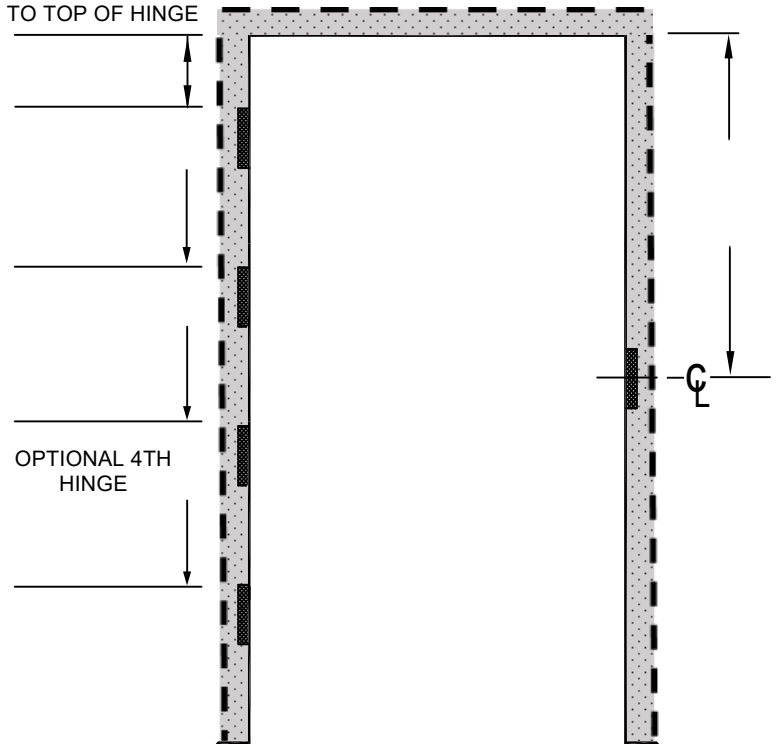

Double rabbet profile only.

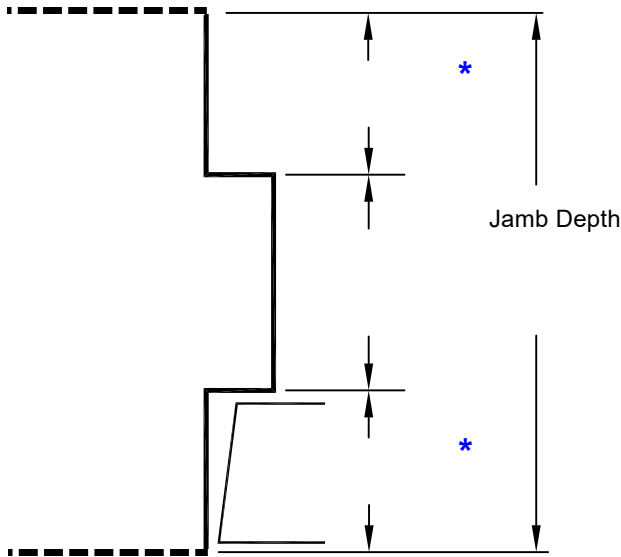

WALL SIZE:

Add 1/4" to wall thickness to obtain correct jamb depth.

HINGE LOCATIONS \* BACKSET \*

HINGE TYPE \* STD WEIGHT HEAVY WEIGHT

HINGE DETAILS:

STRIKE TYPE:

STRIKE DETAILS:

SILENCERS:

**NOTE:** Concealed OH Stop/Holder permitted, PA arm closer only, concealed closers not recommended.

**OTHER DETAILS:**



COMPANY NAME :

PO NUMBER :

JOB NAME :

PAGE OF